

MRPV DC fuse

Standard: IEC 60269-6, GB/T 13539.6

Interrupting Capacity

30,000 amperes at 1000V DC (Time Constant: 1-3ms)



Specifications


Catalog No.	Current Rating	Safety Approvals	
		TUV	
10gPV1U0	1A	●	
10gPV2U0	2A	●	
10gPV3U0	3A	●	
10gPV3.5U0	3.5A	●	
10gPV4U0	4A	●	
10gPV5U0	5A	●	
10gPV6U0	6A	●	
10gPV8U0	8A	●	
10gPV10U0	10A	●	
10gPV12U0	12A	●	
10gPV15U0	15A	●	
10gPV16U0	16A	●	
10gPV20U0	20A	●	

U0 Denotes For 1000V DC:
 ● Denotes For Approval ○ Denotes For Pending

Electrical Characteristics

% of Current Rating	Blowing Time
113%	1 hour Min.
145%	1 hour Max.

Dimensions

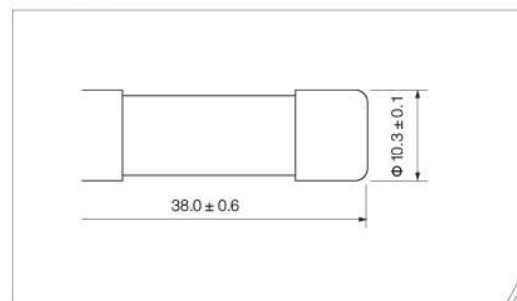

10gPV

Average I-T Characteristics Curve
 (For Reference Only)

